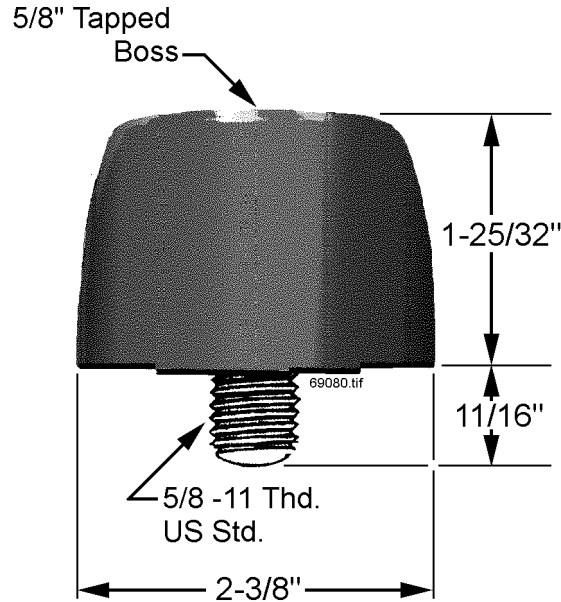


MATERIAL STANDARD**INSULATOR, PHENOLIC SPOOL
NEUTRAL BUS SUPPORT**

General: Molded phenolic insulator is intended for a maximum of 750 volt service. All threads are 5/8" - 11 NC with a minimum of 11/16" thread depth. Cantilever rating is 250 foot pounds (minimum).

Stock Unit: EA

Stock Number: 690880

Approved Manufacturer: O.B. Products #16835
Phoenix Mining Equip. #8525

ORIGINATOR	STANDARDS COORDINATOR	STANDARDS SUPERVISOR	UNIT DIRECTOR
<i>Jim S. Horn</i>	<i>Charles L. Shaffer</i>	<i>John C. Hinner</i>	<i>Hardee J. J.</i>